WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:

H04N 5/262, 5/232

(11) International Publication Number:

WO 92/20186

| A1

(43) International Publication Date:

12 November 1992 (12.11.92)

(21) International Application Number:

PCT/US92/03002

(22) International Filing Date:

14 April 1992 (14.04.92)

(30) Priority data:

690,425

24 April 1991 (24.04.91) US

(71) Applicant: EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, NY 14650 (US).

(72) Inventor: McGARVEY, James, Earl; 403 Birr Street, Rochester, NY 14613 (US).

(74) Agent: KAUFMAN, Stephen, C.; 343 State Street, Rochester, NY 14650-2201 (US).

(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).


Published

With international search report.

(54) Title: 'AN ELECTRONIC CAMERA COMPRISING A SCROLLING CAPABILITY

(57) Abstract

A digital electronic camera (24), that can compensate a mismatch between a high resolution image sensing means (26) and a nominally low resolution internal display (36) comprises a scrolling means (38), so that a preselected portion of an image captured by the image sensing means (26) may be displayed at full resolution, according the memory pixel starting readout address determined by the set of scroll control buttons (46).

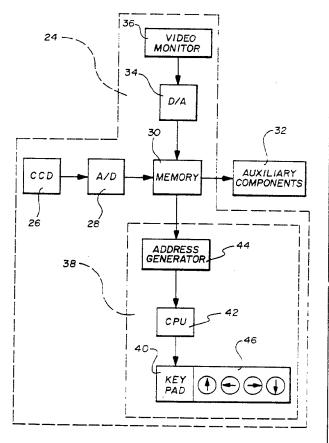

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

. 13:		FI	l-inland	Mi	Mah
AT	Austria	F.R	France	MN	Mongolia
Ali	Australia			MR	Mauritania
BB	Barbados	GA	Gabon	MW	Malawi
BE	Belgtom	GB	United Kingdom		
BF	Burkina Faso	GN	Guinea	NI.	Netherlands
BC	Bulgaria	GR	Greece	NO	Norway
	Benin	HU	Hungaty	PL	Poland
BJ		. IE	Ireland	RO	Romania
BR	Brazil	ıT	Italy	RU	Russian Federation
CA	Canada		-	SD	Sudan
CF	Central African Republic	JP	Japan	SE	Sweden
CC	Congo	KP	Democratic People's Republic	SN	Senegal
CH	Switzerland		of Korca		•
CI	Côte d'Ivoire	KR	Republic of Korea	รบ	Soviet Union
CM	Cameroon	LI	1 iechtenstein	TD	Chad
-		LK	Sri Lanka	TG	Togo
CS	Czechoslovakia		Luxembourg	US	United States of America
DE	Germany	LU	_		
DK	Denmark	MC	Monaco		
60	Smain	MG	Madagascar		

-1-

AN ELECTRONIC CAMERA COMPRISING A SCROLLING CAPABILITY

5 CROSS-REFERENCE TO A RELATED APPLICATION

This application is related to U.S. Patent Application Serial No. 07/690,751 filed April 24, 1991 by McGarvey, which is being filed contemporaneously with this application. The entire disclosure of this application is incorporated by reference herein. Each of these applications is copending and commonly assigned.

BACKGROUND OF THE INVENTION

This invention relates to an improved digital electronic camera.

INTRODUCTION TO THE INVENTION

Attention is first directed to Fig. 1,
which shows a canonical digital electronic camera 10.

The camera 10 includes an imaging sensing

means comprising a charge coupled device (CCD) 12.
The CCD 12 can produce an electro-optical exposure,
for input to a memory 14, and for ultimate viewing
on an internal camera display 16.

SUMMARY OF THE INVENTION

- 25 Commercially available cameras of the type shown in Fig. 1, can now process, by way of the CCD 12, a high resolution digital image comprising a pixel array of, for example, 1280 x 1024 pixel size. Commercially available internal camera 30 displays 16, in sharp contrast, generally have a qualitatively reduced resolution capability. For example, a typically available camera display 16 may comprise a low resolution 479 x 234 pixel size.
- Heretofore, the mismatch between a high resolution CCD, and a low resolution internal camera

-2-

display, has been accepted by the industry, since
the cited deficiency of the low resolution internal
camera display can be offset by its small and
convenient size, as well as its lower cost. At the

5 same time, as shown in Fig. 2, it is known that the
deficiency of a low resolution internal camera
display may be partially offset, through an action
of bypassing the low resolution internal camera
display, in favor of auxiliary high resolution

10 displays. Thus, Fig. 2 shows an extension of the
Fig. 1 camera 10, comprising an auxiliary computer
18 inputting to an auxiliary high resolution video
printer 20, or an auxiliary high resolution video
monitor 22.

I have now recognized that a heretofore seeming trade-off between, on the one hand, a high resolution display, auxiliary to the camera, and, on the other hand, a low resolution internal camera display (albeit, one having the advantages of low cost and weight), are not mutually exclusive desiderata. Rather, I have now discovered a novel method and apparatus for enhancing the capability of the nominally low resolution, internal camera display, so that its virtues of low cost and weight can be retained, while at the same time, its effective resolution can be qualitatively upgraded.

The novel invention, accordingly, has a critical advantage of overcoming the cited deficiencies of mismatching the high resolution capability of the CCD, with the heretofore low resolution internal camera display.

Further, the novel invention gives the user of the camera an enhanced capability of viewing important information, and making decisions about what he sees, at full resolution strength.

Another critical advantage of the novel invention is that it can substantially reduce the area of an image to be transmitted, thereby effecting a substantial reduction in transmission times. This action, in turn, can result in a very favorable reduction in modem rates, as well as reducing possible detection dangers.

Accordingly, I now disclose an improved digital electronic camera comprising:

- a) a high resolution image sensor for producing an electro-optical exposure;
 - b) a memory means connected to the sensor for storing the electro-optical exposure;
- c) a nominally low resolution display
 15 connected to the memory means, for viewing an electro-optical exposure from storage in the memory;
 and
- d) a scrolling means for identifying a subsumed portion of the electro-optical exposure
 stored in the memory, so that a full resolution data readout can be input to the display.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated in the accompanying drawing, in which:

- 25 Fig. 1 shows a canonical digital electronic camera;
 - Fig. 2 shows the Fig. 1 camera with auxiliary components; and
- Fig. 3 shows a canonical digital electronic 30 camera having an electronic scrolling capability.

DETAILED DESCRIPTION OF THE INVENTION

Attention is now directed to Fig. 3, which shows a canonical digital electronic camera 24 having an electronic scrolling capability. The 35 structure of the camera 24 is first articulated,

-4-

followed by a disclosure of its operation.

The camera 24 includes an image sensing means comprising a charge coupled device 26. A preferred CCD 26 is available from Eastman Kodak Company, Model No. KAF-1300. This device is preferred because of its high resolution capabilities, namely, a 1280 x 1024 pixel size.

The camera 26 interfaces with a conventional analog to digital converter 28. The digital output of the converter 28 interfaces with a conventional memory 30, preferably, a memory comprising a D-RAM.

The memory 30 can provide two independent outputs. One output is to auxiliary components 32, comprising external high resolution video printers or external high resolution video monitors. The second output, by way of a conventional digital to analog converter 34, is to an internal low resolution video monitor (or image display) 36.

One example of an acceptable internal low resolution video monitor (36) is a Sharp Corporation Model LQ4RA01. This monitor accepts from memory 30 an approximately 479 x 234 pixel size.

20

As noted above, the present invention can overcome a deficiency arising from the mismatch between the high resolution CCD 26, and the low resolution internal video monitor 36. This is preferably effected by way of a scrolling electronics unit 38.

Fig. 3 shows that the scrolling electronic unit 38 preferably comprises a conventional key pad 40, a microprocessor or conventional central processing unit (CPU) 42, and a conventional address generator 44 which inputs to the memory 30.

The operation of the camera 24 is as

-5-

follows.

An operator of the camera 24 can preferably select a substantially rectangular portion of a high resolution digital image residing in the memory 30, for internal display, or external display by way of the auxiliary components 32.

A selected portion of the high resolution image conveniently fits on the video monitor 36 screen. A selected area, however, can be scrolled in both horizontal and vertical directions, i.e., to any desired location.

Operation of this scrolling function may be accomplished through a set of controls 46 on the key pad 40. The set of controls 46 comprise four scroll buttons (shown by arrows), which can position an image in each of four directions. The set of controls 46 also functions to control an address in the memory 30, where image data readout can occur.

The desired address determined by the set
of controls 46, inputs to the CPU 42. The CPU 42
may be conventionally programmed (see illustrative
Program, Appendix) to change a starting memory
address, in accordance with the set of control 46
inputs. The CPU 42, accordingly, inputs this new
starting address to the address generator 44. The
address generator 44, in turn, preferably comprising
a conventional pre-selectable counter, can provide a
memory pixel address, for ultimate high resolution
image data readout to the video monitor 36.

30

-6-

APPENDIX

Language PL-M

```
5 Do Forever;
    IF (INPUT_KEY = UP) AND (START_ADDRESS > 1280)
      THEN START_ADDRESS = START_ADDRESS - 1280;
    IF (INPUT_KEY = DOWN) AND (START_ADDRESS < 1024 1280)
      THEN START_ADDRESS = START_ADDRESS + 1280;
10
     IF (INPUT_KEY = LEFT) AND
       (START_ADDRESS MOD 1280 > 1)
      THEN START_ADDRESS = START_ADDRESS -1;
15
     IF (INPUT_KEY = RIGHT) AND
       (START_ADDRESS MOD 1280 < 1279)
      THEN START_ADDRESS = START_ADDRESS +1;
    ADDRESS_COUNTER = START_ADDRESS;
20
   END;
```

25

30


PCT/US92/03002

I CLAIM:

WO 92/20186

- An improved digital electronic camera comprising:
- a) a high resolution image sensor for5 producing an electro-optical exposure;
 - b) a memory means connected to the sensor for storing the electro-optical exposure;
- c) a nominally low resolution display connected to the memory means, for viewing an
 electro-optical exposure from storage in the memory; and
- d) a scrolling means for identifying a subsumed portion of the electro-optical exposure stored in the memory, so that a full resolution data 15 readout can be input to the display.
 - The camera according to claim 1, wherein the sensor comprises a charge coupled device.
 - 3. The camera according to claim 1, wherein the memory means comprises a D-RAM.
- 4. The camera according to claim 1, wherein the sensor comprises an approximately 1280 x 1024 pixel size, and the display comprises an approximately 479 x 234 pixel size.
 - 5. The camera according to claim 1,
- 25 wherein the scrolling means comprises:
 - a) a key pad comprising scroll
 capabilities for positioning the electro-optical
 exposure vis-à-vis the display;
- b) a computing means connected to the key 30 pad, for computing and defining memory addresses based upon the key pad positioning; and
- c) an address generator connected to the computing means, for inputting to the memory means
 35 the memory addresses defined by the computing means.

CCD --10 FIG. I 12 MEMORY 16 DISPLAY CCDFIG. 2 22 12 COMPUTER **MEMORY** MONITOR 16 -20 DISPLAY PRINTER

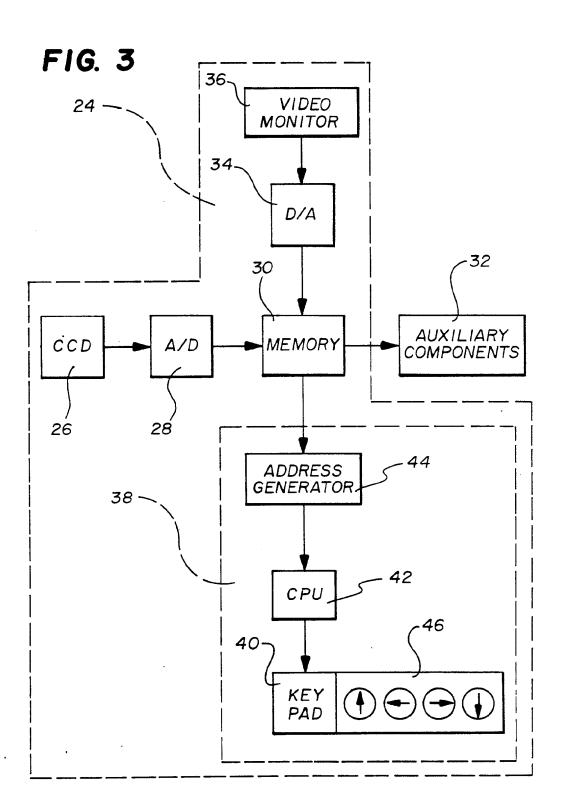

International Application No

	CCT MATTER (if several classification symbol		
According to International Patent Int. Cl. 5 H04N5/26	Classification (IPC) or to both National Classi 2: H04N5/232	ification and IPC	
1110.01. 3 1104113723	L, (10 1110, 200		
II. FIELDS SEARCHED			
	Minimum Documenta		
Classification System	Cla	ssification Symbols	
Int.Cl. 5	HO4N5; HO4N7;	H04N1	
·	Documentation Searched other that to the Extent that such Documents are	n Minimum Documentation Included in the Fields Searched ⁸	
III. DOCUMENTS CONSIDER	ED TO BE RELEVANT 9		
	ocument, 11 with indication, where appropriate	, of the relevant passages 12	Relevant to Claim No. ¹³
	_		•
X US,A,4	996 592 (YOSHIDA) 26 Feb	ruary 1991 2 line 38	1
see col	umn 1, line 61 - column 2 umn 5, line 66 - column 2	7. line 2	
A see co.	diiii 5, 1110 00 00 121111 1	,	3,5
110 1 4	746 980 (PETERSEN) 24 May	, 1988	1,3,5
A US,A,4	umn 2, line 52 - column	4. line 8	
see col	umn 6, line 37 - line 66	; figure 1	
Y EP,A,0	129 122 (POLAROID CORP.)	27 December	1
see pag	ge 1, line 8 - page 3, li	ne 2	
1	je 4, line 13 - page 8, l	ine 30	2
Α			_
	. · ·	-/	
° Special categories of cited of "A" document defining the considered to be of part	general state of the art which is not	"T" later document published after the intern- or priority date and not in conflict with t cited to understand the principle or theor invention	ne application out
"E" earlier document but pu filing date		"X" document of particular relevance; the cla cannot be considered novel or cannot be involve an inventive step	imed invention considered to
which is cited to establicitation or other special "O" document referring to a	sh the publication date of another	"Y" document of particular relevance; the cla cannot be considered to involve an inven document is combined with one or more ments, such combination being obvious t	tive step when the other such docu-
other means "P" document published price later than the priority described the priority of the priority described	or to the international filing date but ate claimed	in the art. "&" document member of the same patent far	
IV. CERTIFICATION			
Date of the Actual Completion	of the International Search	Date of Mailing of this International Sea	rch Report
17 A	UGUST 1992	2 7. 08. 92	
International Searching Authori	ty	Signature of Authorized Officer	1 1/4/
EUROP	EAN PATENT OFFICE	DUHR R.H.J.E.	

Form PCT/ISA/210 (second sheet) (January 1985)

	International Application No	
II. DOCUMEN	NTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)	GI : No
ategory o	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
	A TABLE	1
,Υ	PATENT ABSTRACTS OF JAPAN	
	vol. 16, no. 23 (E-115/)21 January 1992	
	PATENT ABSTRACTS OF JAPAN vol. 16, no. 23 (E-1157)21 January 1992 & JP,A,3 239 067 (SONY CORP.) 24 Cctober 1991	
	see abstract	5
\	%	
		i
-		1
		•
h -		•
i		1
;		· ·
1		•
6		1
		1
į		
		i i
ļ		
1		
		1
		•
		1
	••	1
		Į.
b.		
į		
	·	
l 1		
-	•	
1		

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. US 9203002

59278

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 17/08/92

US-A-4996592 26-02-91 JP-A- 20506	590 20-02-90
	20-02-90
JS-A-4746980 24-05-88 None	
EP-A-0129122 27-12-84 US-A- 45410 CA-A- 12477 JP-A- 600247	735 27-12-88